

SUMMIT TELECOM

©2013 SUMMIT TELECOM ALL RIGHTS RESERVED

Web: www.summittelecomm.com


E-mail: sales@summittelecomm.com

summittelecomm@hotmail.com



FTTH Construction

Clip Wedge Anchor Fittings

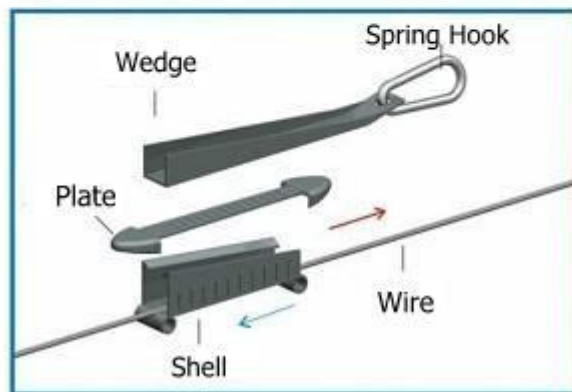



Pole Application



Wall Application



Double Sides Inlets Application



Two Wires Application

- **Introduction:**

The two covered wire cable to connect directly with the anchor Remarks:suitable for all installation sites.Operating essentials:the Self-covered wire cable wire directly from the plate passes under, or within the first shell into the cone,then add the wire plate (cover covered wire cable) and the tapered wedge,with the wedge on the spring hook on the anchor fixed see Snap and then holding the two tapered conical shell body relaxed state,while the other hand to straighten the laying of the covered wire cable,cone shell reverse driving force to clamp material covered wire cable.When removing a wedge can relax when you hit the cone.

- **Accessories description:**

Using two socket locking force generated between the principle of direct clamping cable.As the built-in wire diameter is much larger than optical,so endurance is only acting on the wires,and can remain in use clamped state,and because the force so that even a small taper,taper can be easily disassembled.

- **Experience Reference:**

Better use of both ends of the wiring.

Wire does not require the separation operation,but re-tighten the points in front of accessories,exert oneself is not easy to straighten.Excessive use of a dock operation or home to receive the adjustment screw so tight can help straighten tightened.