

SUMMIT TELECOM

©2013 SUMMIT TELECOM ALL RIGHTS RESERVED

Web: www.summittelecomm.com

E-mail: sales@summittelecomm.com

summittelecomm@hotmail.com



FTTH Fast Connector and Mechanical Splicer

Item Code:STFC-SC

FTTH Fast Connector SC



NINGBO SUMMIT TELECOM ALL RIGHTS RESERVED 2011




We are China leading manufacturer for FTTH Fast Connector SC, Quick Connector, and also other FTTH Fast Connection Elements.

Features:

- Application for FTTH fast connection, for FTTH drop cable as mechanical splice using few tool.
- Field assemble; Use few tool; Easy to operate; Only need less than one minute for installation.
- The whole progress can be visualized. Optic fiber run in controlled range. Successful rate can reach the limit value 100%.
- Can make the patch cord at any length on site, and no need to adhesive and Polish.
- SC/PC, SC/APC types available.
- No need to hot melt and save the power supplies. With excellent optical properties, it can be installed repeated over 10 times.

Structure:

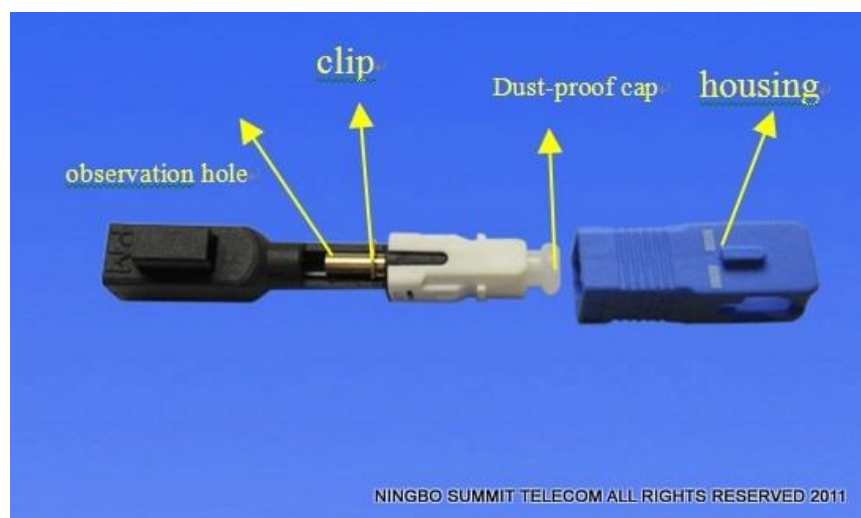

Technical Specifications:

Applicable for	φ2mm/φ3mm Indoor cable
Optical fiber diameter	125μm (652 & 657)
Tight buffer diameter (μm)	900μm
Fiber mode	Single & multi mode
Operation time	About 120s (no fiber cut)
Insert loss	≤ 0.3dB (1310nm & 1550nm)
Return loss	≤ -40dB
Fastening strength of naked fiber	>5 N
Fastening strength of naked fiber holder	>10 N
Tensile strength	>50 N
Using temperature	-40~+75°C
On-line tensile strength (20 N)	IL ≤ 0.2dB RL ≤ 5dB
Mechanical durability (500 times)	IL ≤ 0.2dB RL ≤ 5dB
Drop-off test (drop-off height 4m, once per direction, totally 3 times)	IL ≤ 0.2dB RL ≤ 5dB