

# SUMMIT TELECOM

©2013 SUMMIT TELECOM ALL RIGHTS RESERVED

Web: [www.summittelecomm.com](http://www.summittelecomm.com)

E-mail: [sales@summittelecomm.com](mailto:sales@summittelecomm.com)

[summittelecomm@hotmail.com](mailto:summittelecomm@hotmail.com)




**Indoor Fiber Optic Cables**

**Item Code: STIFC-GJFJ8V-2**

## **GJFJ8V-2 Indoor Dual Core Fiber Optic Cable II**



NINGBO SUMMIT TELECOM CO.,LTD ALL RIGHTS RESERVED 2012

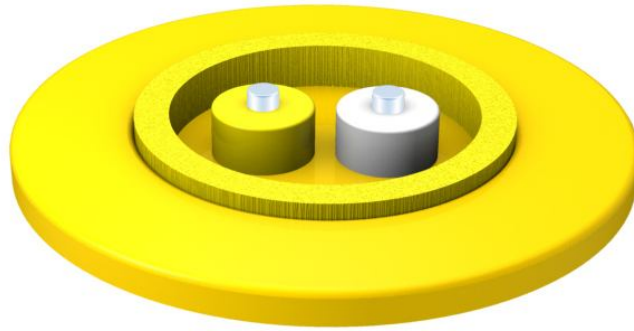

NINGBO SUMMIT TELECOM CO.,LTD ALL RIGHTS RESERVED 2012

### Description

GJFJ8V-2 Indoor Dual core Fiber Optic Cable II:dual-core tight tube optical fiber,high-modulus aramid strength member, and high-performance outer sheath material.

### Features

- Small diameter, small bending radius, Light weight.
- Product life is 15 years.

### Applications

- Indoor wiring
- Dual-core jumpers and pigtails
- Connecting line among local area network, equipment, and instruments

### Technical Specifications

Number of cores	Specification (mm)	Tensile force (N)		flattening force (N/100mm)		Minimum bending radius (mm)		V Weight (kg/km)	ZY Weight (kg/km)
		Transient	Long	Transient	Long	Dynamic	Static		
2	4.50	500	300	1000	200	100	30	16.8	18.8
2	4.20	220	140	1000	200	100	30	14.2	16.1
2	3.60	200	130	500	100	100	30	8.4	9.5
2	3.20	200	130	500	100	100	30	6.7	7.5
2	3.00	150	100	500	100	100	30	6.2	7.0
2	2.50	150	100	500	100	100	30	4.5	5.0

Note: ① In fiber weight, V represents tight tube jacket is made of PVC flame-retardant material.ZY said the jacket for low smoke, non-halogen flame retardant sheath material .

② Typical values can be adjusted according to actual situation;

③ Custom products are available.

### Environmental Performance

- Temperature: installation temperature: 0°C ~ +60°C  
operating temperature: -20°C ~ +60°C
- Executive standards: YD/T 1258.2-2003
- Flame retardant rating: UL OFNR