

SUMMIT TELECOM

©2013 SUMMIT TELECOM ALL RIGHTS RESERVED

Web: www.summittelecomm.com

E-mail: sales@summittelecomm.com

summittelecomm@hotmail.com




Outdoor Fiber Optic Cables

Item Code: STOFc-GYFTA53

GYFTA53 Loose Tube Stranded Fiber Optic Cable with LAP and PSP Armored Double PE Sheath



NINGBO SUMMIT TELECOM CO., LTD ALL RIGHTS RESERVED 2012

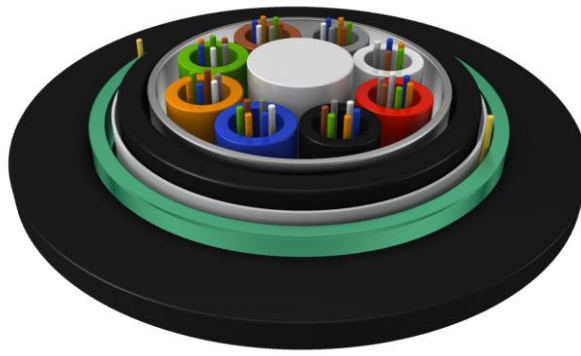

NINGBO SUMMIT TELECOM CO.,LTD ALL RIGHTS RESERVED 2012

Description

GYFTA53 is an outdoor communication fiber optic cable of non-metallic strength member of the loose tube jelly-filled structure, with Al-polyethylene laminated sheath longitudinally covered with corrugated steel-tape armored polyethylene outer sheath.

Features

- Full cross-section water-blocking structure and double-sided coated film steel belt longitudinal application ensure good water blocking and moisture resistance.
- Loose tube is filled with special ointment for key protection of fiber
- High-modulus glass fiber reinforced plastics (FRP) central strength member
- Double-sided coated aluminum with vertical cover ensures radial moisture protection and enhances resistance to lateral pressure.
- Non-metallic strength member is applicable for multithunder area.
- Product life is 30 years

Performance Indicators

- Applications: suitable for long-distance communication and indoor communication
- Way of laying: direct burial in multithunder area.
- Operating temperature: $-40 \sim +70^{\circ}\text{C}$
- Bend radius: static 12.5x cable diameter
dynamic 25x cable diameter

Technical Specifications

Number of cores	Number of cable cores	Maximum fiber cores in loose tube	Cable diameter (mm)	Cable weight (kg/km)	Allowable tension (N)		Allowable flattening force (N/100 mm)	
					short	long term	short	long term
2-30	5	6	12.9	150	≥ 3000	≥ 1000	≥ 3000	≥ 1000
32-60	5	12	13.4	165				

62-72	6	12	14.1	183				
74-84	7	12	15.4	220				
86-96	8	12	15.4	220				