

SUMMIT TELECOM

©2013 SUMMIT TELECOM ALL RIGHTS RESERVED

Web: www.summittelecomm.com


E-mail: sales@summittelecomm.com
summittelecomm@hotmail.com



Outdoor Fiber Optic Cables

Item Code: STOFc-GYXTW53

GYXTW53 Metal Strength Member Fiber Optic Cable

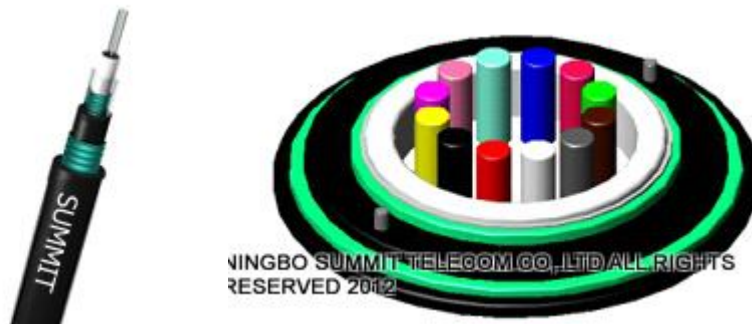

Description

GYXTW53 is an outdoor communication fiber optic cable of metal strength member of the loose tube jelly-filled structure, with polyethylene laminated sheath longitudinally covered with corrugated steel-tape armored polyethylene outer sheath.

Features

- Full cross-section water-blocking structure to ensure good water blocking and moisture resistance
- Loose tube is filled with special ointment for key protection of fiber
- Double-sided vertically-clad corrugated steel-tape armor effectively improves the resistance to lateral pressure
- More than 30 years of service life.

Performance Indicators

- Applications: suitable for long-distance communication and indoor communication
- Way of laying: direct burial, pipeline
- Operating temperature: -40 ~ + 70 °C

- Bend radius: static 10x cable diameter
dynamic 20x cable diameter

Technical Specifications

Number of cores	Maximum fiber cores in loose tube	Cable diameter (mm)	Cable weight (kg/km)	Allowable tension (N)		Allowable flattening force (N/100 mm)	
				short	long term	short	long term
2-8	8	12.9	160	≥1500	≥600	≥1000	≥300
10-12	12	12.9	164				