

SUMMIT TELECOM

©2013 SUMMIT TELECOM ALL RIGHTS RESERVED

Web: www.summittelecomm.com

E-mail: sales@summittelecomm.com


summittelecomm@hotmail.com



Disconnection Module

Item Code: STQCM

10 Pair Quick Connect Module Tool less Outdoor Module

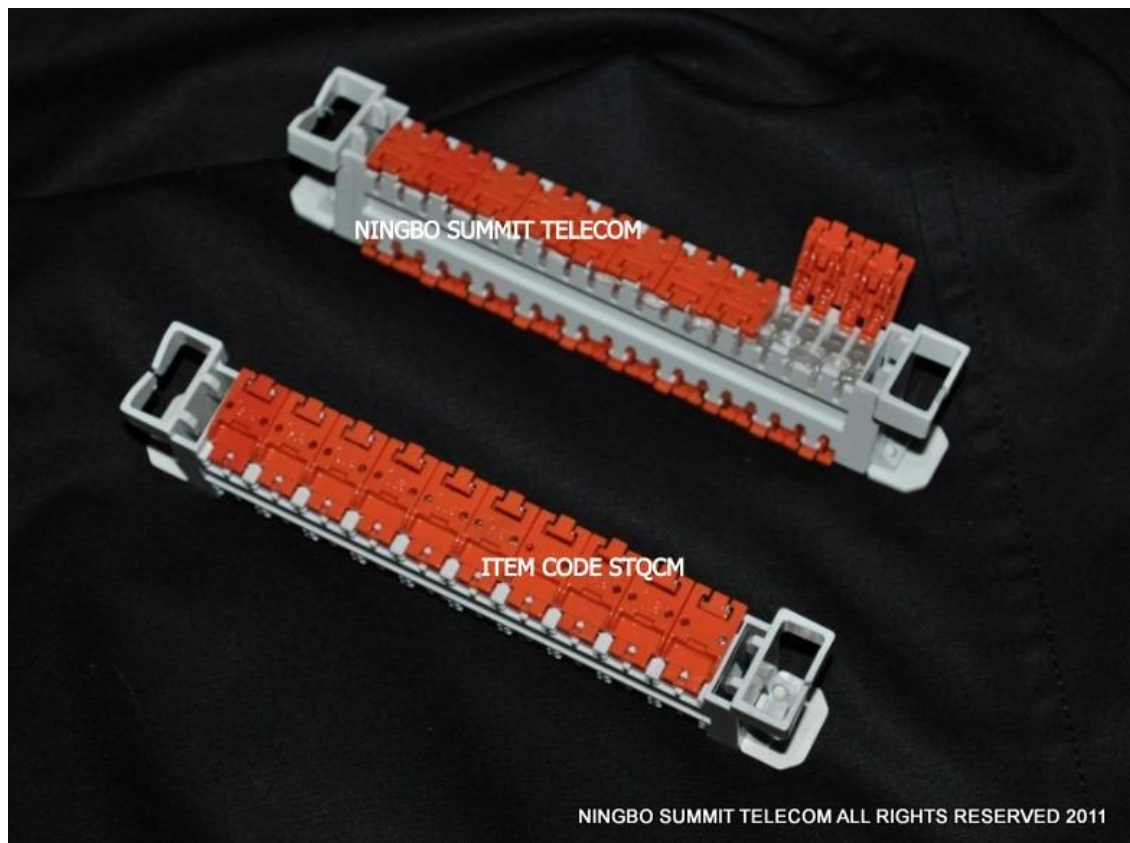

Summit Telecom is China leading manufacturer provides Quick Connect Module, which is Tool Less Outdoor Module applicable for FTTN+DSL Solutions.

Features:

- Material: PC/PPT/ABS Material
- Contact Pins: Silver/Tin plated Phosphor Bronze
- With silicon gelly inside, good Performance For Waterproof.
- Cable Termination Tool-Less

- Cat.5e Performance
- Application for FTTN+DSL Solutions Outside Plant Connections, installed in OSP DP Box Or Cross Connection Cabinet.

Technical Specifications:

- Temperature: -5 - 40°C
- Relative humidity: <85% (+30°C)
- Atmospheric pressure: 70 106Kpa
- Intermediate resistance: no more than 3m ohm under standard examination condition
- Performance impedance: 120Ω (balance)
- Insulation resistance: 1,000mΩ / 500V (DC)
- Resistance to voltage: no breakdown or arc for 1 minute under 1kV (DC)
- Crosstalk ratio: ≥60dB (50kHz - 210MHz)
- Plug-in loss: ≤0.4dB (50kHz - 210MHz)
- Back wave loss: ≥18dB (50kHz - 210MHz)