

SUMMIT TELECOM

©2013 SUMMIT TELECOM ALL RIGHTS RESERVED

Web: www.summittelecomm.com

E-mail: sales@summittelecomm.com
summittelecomm@hotmail.com




Outdoor Fiber Optic Cables

Item Code: STOFc-GYFTS

GYFTS Non-metallic Strength Member Loose Tube Stranded Fiber Optic Cable with PSP Sheath



NINGBO SUMMIT TELECOM CO., LTD ALL RIGHTS RESERVED 2012

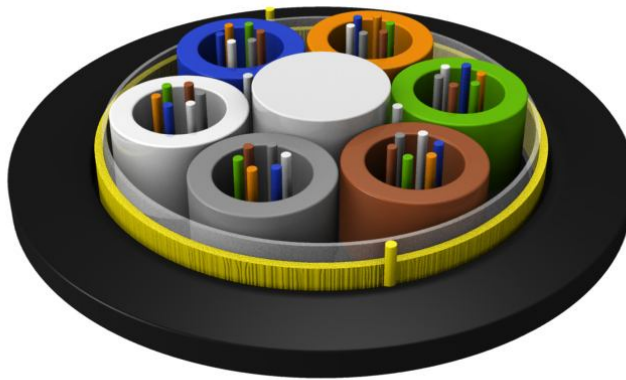

NINGBO SUMMIT TELECOM CO., LTD ALL RIGHTS RESERVED 2012

Description

GYFTS is an outdoor communication fiber optic cable of non-metallic strength member of the loose tube jelly-filled structure, with steel-polyethylene laminated sheath.

Features

- Full cross-section water-blocking structure and double-sided coated steel with vertical cover ensure good water blocking and moisture resistance
- The loose tube is filled with special factice for key protection of fiber.
- High-modulus glass fiber reinforced plastics (FRP) central strength member
- Product life is 30 years

Performance Indicators

- Applications: suitable for long-distance communication and indoor communication
- Way of laying: overhead, pipeline
- Operating temperature: $-40 \sim +70^{\circ}\text{C}$
- Bend radius: static 10x cable diameter
dynamic 20x cable diameter

Technical Specifications

Number of cores	Number of cable cores	Maximum fiber cores in loose tube	Cable diameter (mm)	Cable weight (kg/km)	Allowable tension (N)		Allowable flattening force (N/100 mm)	
					short	long term	short	long term
2-30	5	6	9.8	92	≥ 1500	≥ 600	≥ 1000	≥ 300
32-60	5	12	10.7	107				
62-72	6	12	11.3	123				
74-84	7	12	12.7	153				
86-96	8	12	12.7	153				
98-120	10	12	14.5	191				

122-144	12	12	16.0	232				
146-216	18	12	16.7	243				
218-300	25	12	19.0	307				